



# FRIGOMATIC SYSTEMS INSTRUCTIONS


## ELECTRIC CONNECTIONS

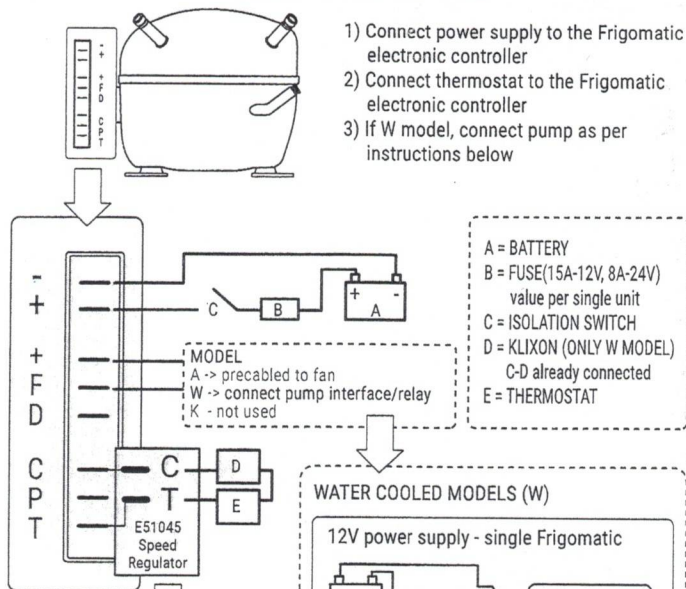

### WATER COOLED MODELS (W)

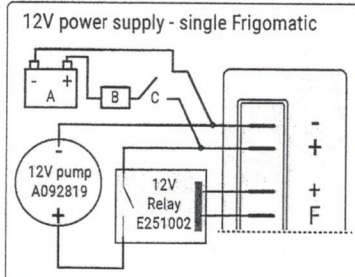


### 12-24V power supply - multiple Frigomatic

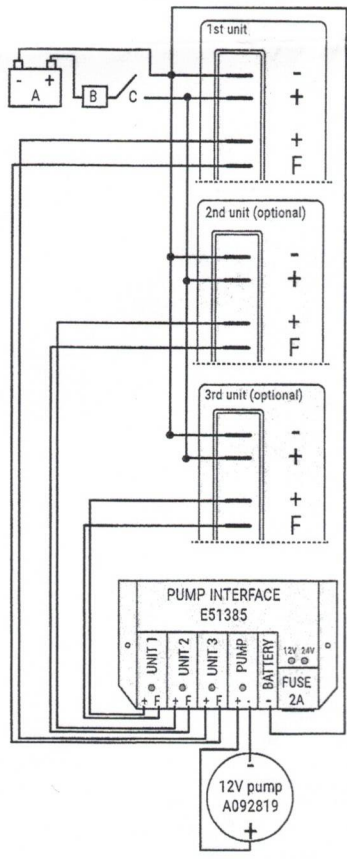


### AC-DC MODELS

In case of AC-DC hybrid models, DC connections are the same as for DC ones, while AC shall be collected as per the below schematics.

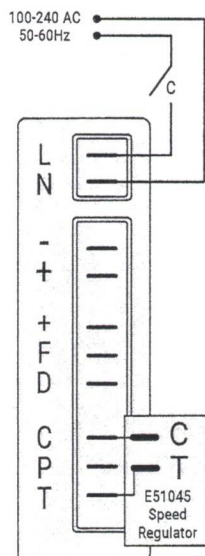


## REFRIGERANT CONNECTIONS


### WATER COOLED MODELS (Milano W, W50, W35)

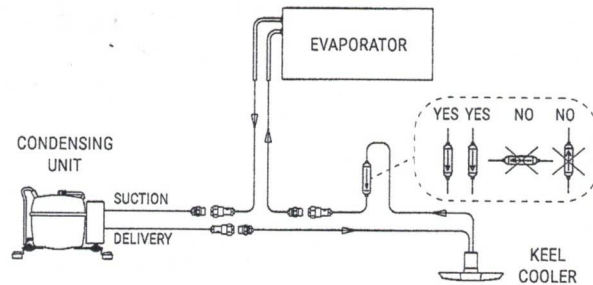

### AIR COOLED AND KEEL COOLED MODELS (Milano K, K50, K35, Milano A, all air cooled)

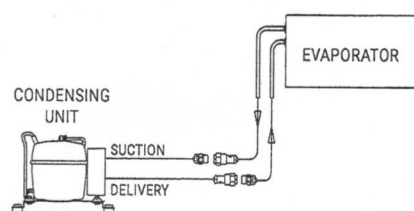


## WATER CONNECTIONS (only W models)

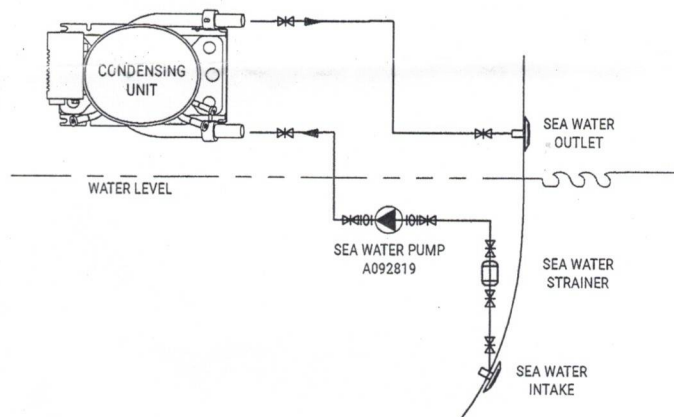

## THERMOSTAT SENSOR

The thermostat is provided with a temperature probe that needs to be installed on the evaporator plate itself, on the plastic support; make sure it does not touch the aluminium of the evaporator.

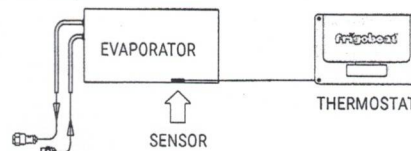

THESE ARE ONLY PARTIAL INFORMATION, PLEASE CHECK THE FRIGOMATIC MANUAL FOR MORE INSTALLATION AND USAGE INSTRUCTIONS!