

X-15P



A 15" versatile and hard glass-protected display featuring Advanced Image Platform™ technology and metal housing delivers enduring performance for professional environments.

The X-15P presents authentic colours and contrast with its Advanced Image Platform™ (AIP) technology. 5,000,000:1 dynamic contrast ratio allows delivering sharp images. Integrated with NeoV™ Optical Glass to protect the panel from water, dust and incidental damage, built-in video support and robust metal casing, the X-15P is a durable display and an ideal choice for multi-user environments where space is at a premium.

- > NeoV™ Optical Glass
- > AIP technology: PIP and PBP functions; Built-in Image Enhancer
- > High 350 cd/m² brightness
- > Crisp 5,000,000:1 dynamic contrast ratio
- > EcoSmart Sensor automatically adjusts backlight according to ambient lighting condition
- > Built-in speakers (1.5W x 2)
- > Black-level alignment
- > VESA standard wall mount
- > Durable metal housing
- > Available colours: black, white
- > Rigorous screening of the components for mission-critical 24/7 applications



NeoV™ Optical Glass - The most trusted hard glass protection available. Only on AG Neovo displays



X-15P

Specifications

X-15P

| | | |
|-----------------------------|-----------------------------|---|
| Panel | Panel Type | LED-Backlit TFT LCD |
| | Panel Size | 15.0" |
| | Max. Resolution | XGA 1024 x 768 |
| | Pixel Pitch | 0.297 mm |
| | Brightness | 350 cd/m ² |
| | Contrast Ratio | 700:1 |
| | Viewing Angle (H/V) | 170°/160° |
| | Display Colour | 16.7 M |
| | Response Time | 4 ms (GTG) |
| Frequency (H/V) | H Freq. | 24 kHz - 81 kHz |
| | V Freq. | 50 Hz - 75 Hz |
| Input | Analogue | 15-Pin D-Sub |
| | Digital | 24-Pin DVI-D |
| | S-Video | 4-Pin Mini DIN |
| | CVBS | RCA |
| Audio | Audio In | 1 x stereo audio in for PC (audio jack, 3.5 Ø) 1 x stereo audio in for CVBS or S-Video (RCA) |
| | Speaker | 1.5 W x 2 |
| Power | Power Supply | External |
| | Power Requirements | DC 12 V |
| | Consumption | < 17 W (On) < 0.5 W (Stand-by) < 0.5 W (Off) |
| NeoV™ Optical Glass | Thickness | 3.0 mm (0.18") |
| | Reflection Rate | < 2% |
| | Transmission Rate | > 96% |
| | Coating Hardness | > 8H |
| Plug & Play | VESA | DCC 2B, DCC/CI |
| Operating Conditions | Temperature | 0°C ~ 40°C |
| | Humidity | 10% ~ 90% |
| Storage Conditions | Temperature | -20°C ~ 60°C |
| | Humidity | 5% ~ 95% |
| Mounting | VESA FPMPMI | Yes (100 x 100 mm & 75 x 75 mm) |
| Tilt | Tilt | 0° ~ +20° |
| Dimensions | Product (W x H x D) | 380 x 359 x 155 mm (15.0" x 14.1" x 6.1") |
| | Packaging (W x H x D) | 454 x 422 x 190 mm (17.9" x 16.6" x 7.5") |
| Weight | Product Weight | 4.7 kg (10.4 lb) |
| | Packaged Product Weight | 6.3 kg (13.9 lb) |
| Regulation Approval | Certifications & Compliance | CB, FCC, CE, WEEE, RoHS, REACH |
| Accessories | Supplied | CD ROM (User Manual), Power Cord, Power Adaptor, 15-Pin D-Sub Cable, Audio Cable, Warranty Card |



NeoV™ Optical Glass and durable metal casing for water, dust and scratch resistance




Flexible image viewing options such as PIP/PBP, freeze, 180° image rotation



Front-panel keypad with Input Select, Screen Menu, Contrast and Brightness controls for quick adjustments



Wide range of I/O connectors for flexibility and expandability in video installations

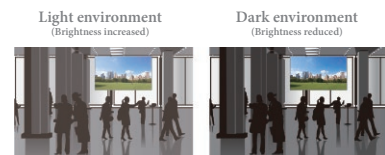

EcoSmart Sensor auto adjusts brightness for ultra low power consumption

